


2t ROOF SHEET SPREADER BEAM

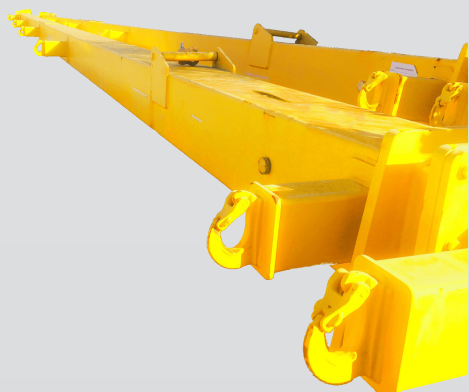

DESCRIPTION

WLL:	2 tonne @ 60 degrees evenly distributed
Lifting Lugs (top) suit:	3.25 tonne Grade 'S' safety bow shackle
Load Lugs (lower) suit:	Excavator Hook
Length:	14m - 18m extendable

PRODUCT ASSURANCE

Parent Standard:	AS4991
Proof Load Testing	Yes
MPI Weld Inspection	Yes

